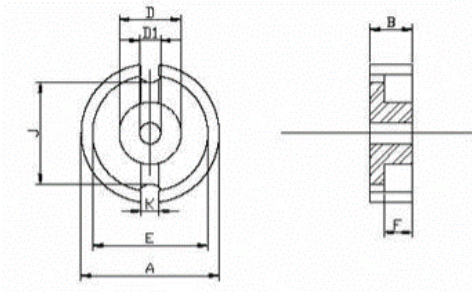


越峰電子材料股份有限公司 ACME Electronics Corporation			客戶規格編號(Customer Spec.No.)																																					
客戶特殊規格書 (Customer Specification)	品名: (Part No.) P4POT30CH	客戶名稱 (Customer)	生效日期(Effective Date)																																					
客戶料號(Customer Part No.):			版次(Version) 第一版																																					
 尺寸規格 Dimensions (mm) : <table><tr><td>A</td><td>B</td><td>D</td><td>D1</td><td>E</td><td>F</td><td>J</td><td>K</td></tr><tr><td>30.00±1.20</td><td>9.50±0.30</td><td>12.30±0.50</td><td>5.50±0.30</td><td>25.40±0.80</td><td>6.60±0.30</td><td>20.25±0.50</td><td>3.80±0.50</td></tr></table> <table><tr><td>Ae</td><td>Le</td><td>Ve</td></tr><tr><td>125.68mm²</td><td>57.63mm</td><td>7243.48mm³</td></tr></table> 電磁特性規格 (Electrical Characteristics): 低鐵損材質 (Low loss Material) <table><tr><td>材質 (Material)</td><td>初導磁率 μi</td><td>電感(Inductance) AL(nH/N²)</td></tr><tr><td>P4</td><td>2500±25%</td><td>4500±25%</td></tr></table> 測試條件(Testing Condition): <table><tr><td>測試條件 Condition</td><td>10kHz,50mV</td></tr><tr><td>測試儀器 Equipment</td><td>卡尺(callipers)/HP4284A</td></tr><tr><td>室溫 Temperature</td><td>25°C±3°C;</td></tr><tr><td>線圈 COIL</td><td>0.25mm,10TS (ACME)</td></tr></table> REMARK:					A	B	D	D1	E	F	J	K	30.00±1.20	9.50±0.30	12.30±0.50	5.50±0.30	25.40±0.80	6.60±0.30	20.25±0.50	3.80±0.50	Ae	Le	Ve	125.68mm ²	57.63mm	7243.48mm ³	材質 (Material)	初導磁率 μi	電感(Inductance) AL(nH/N ²)	P4	2500±25%	4500±25%	測試條件 Condition	10kHz,50mV	測試儀器 Equipment	卡尺(callipers)/HP4284A	室溫 Temperature	25°C±3°C;	線圈 COIL	0.25mm,10TS (ACME)
A	B	D	D1	E	F	J	K																																	
30.00±1.20	9.50±0.30	12.30±0.50	5.50±0.30	25.40±0.80	6.60±0.30	20.25±0.50	3.80±0.50																																	
Ae	Le	Ve																																						
125.68mm ²	57.63mm	7243.48mm ³																																						
材質 (Material)	初導磁率 μi	電感(Inductance) AL(nH/N ²)																																						
P4	2500±25%	4500±25%																																						
測試條件 Condition	10kHz,50mV																																							
測試儀器 Equipment	卡尺(callipers)/HP4284A																																							
室溫 Temperature	25°C±3°C;																																							
線圈 COIL	0.25mm,10TS (ACME)																																							
核准(Approved by):	審查(Checked by):	制定(Prepared by): Renjie Xiao	頁次(Page)1/1 KS																																					