


KBU6A THRU KBU6M

6.0 A Single-Phase Silicon Bridge Rectifier
Rectifier Reverse Voltage 50 to 1000V




Features

- Ideal for P.C. Board mounting
- High surge current capability
- This series is UL listed under the Recognized Component Index, file number E142814
- The plastic material used carries Underwriters Laboratory flammability recognition 94V-0
- High temperature soldering guaranteed 265 °C /10 seconds at 5 lbs (2.3kg) tension

Mechanical Data

Case: Molded plastic body
 Terminals: Plated leads solderable per MIL-STD-202,
 Method 208
 Polarity: Polarity symbols molded on body
 Mounting Position:: Any
 Mounting Torque: 5 in-lbs max.
 Weight: 0.3 ounce, 8.0 grams (approx)

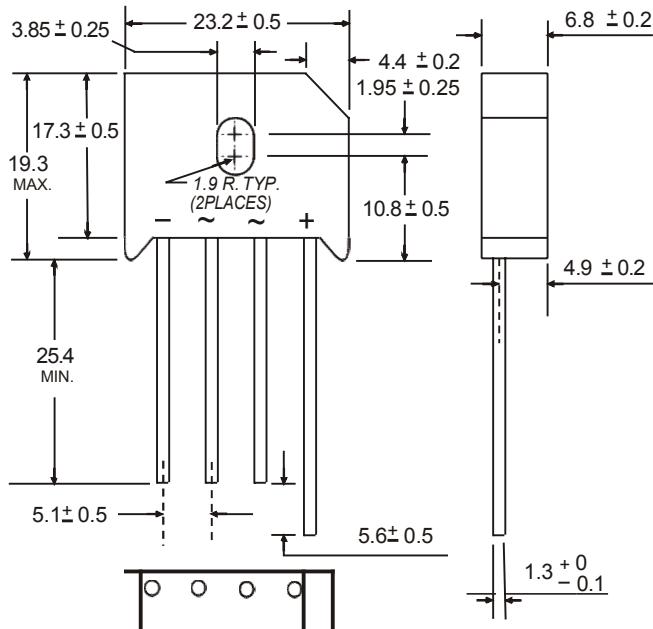

Dimensions in millimeters = 0.0394"

Maximum Ratings & Thermal Characteristics

Rating at 25 °C ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz.
 For Capacitive load derate current by 20%.

Parameter	Symbol	KBU 6A	KBU 6B	KBU 6D	KBU 6G	KBU 6J	KBU 6K	KBU 6M	unit
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS bridge input voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at TA=100 °C	IF(AV)				6.0				A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	IFSM				250				A
Rating for fusing (t<8.3ms)	I ² t				300				A ² sec
Typical thermal resistance per element (1)	ReJA				2.7				°C / W
Operating junction and storage temperature range	T _J , T _{STG}				-55 to + 150				°C

Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified. Resistive or Inductive load, 60Hz.
 For Capacitive load derate by 20 %.

Parameter	Symbol	KBU 6A	KBU 6B	KBU 6D	KBU 6G	KBU 6J	KBU 6K	KBU 6M	Unit
Maximum instantaneous forward voltage drop per leg at 6.0A	VF				1.1				V
Maximum DC reverse current at rated TA =25 °C DC blocking voltage per element TA =125°C	IR				10 500				mA

Notes: (1)Thermal resistance from Junction to Ambient on P.C.board mounting.

Rating and Characteristic Curves ($T_{Ae} = 25^\circ$ Unless otherwise noted) **KBU6A thru KBU6M**

Fig. 1 Derating Curve for Output Rectified Current

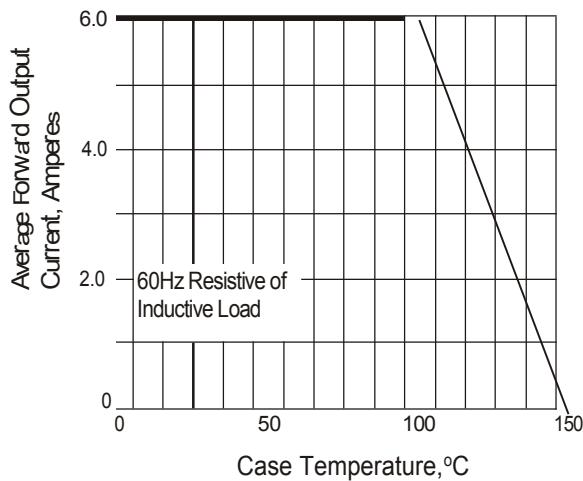


Fig. 3 Typical Instantaneous Forward Characteristics

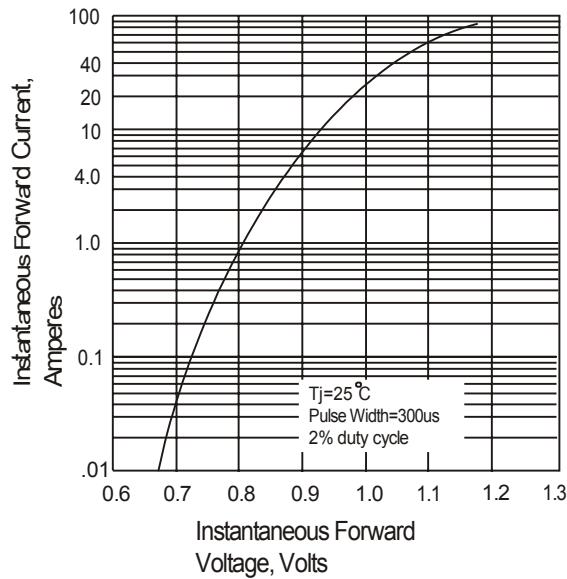


Fig. 2 Maximum Non-repetitive Peak Forward Surge Current

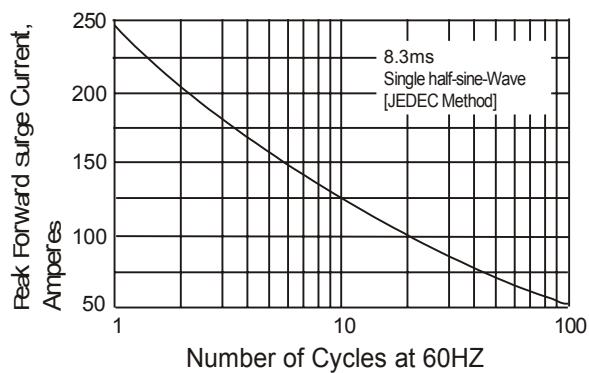


Fig. 4 Typical Reverse Characteristics

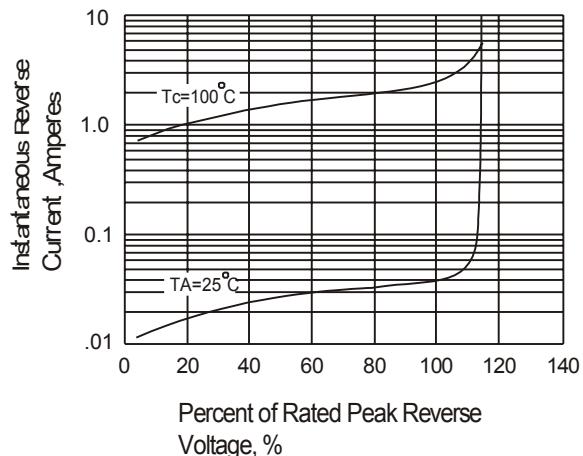


Fig. 5 Typical Junction Capacitance

