

Version 1.0

QJ—16921-90—2017

SPECIFICATION

OF PRODUCTS

CUSTOMER : _____

PRODUCT NAME: _____ ULTRASONIC FLOW SENSOR

PART NUMBER : _____ PSC1.0M022302H2AD0-B0

Approved by	Checked by	Drawn by
刘云明 2017.7.20	黄国华 2017.7.20	胡余平 2017.7.20

ZHEJIANG JIAKANG ELECTRONICS CO., LTD.

Add: No.1188, Jiahang Road, Jiaxing, Zhejiang, China (314001)

Tel : +86-573-82600912 82600913 82600953 82600955

Fax : +86-573-82600916

E-mail : sales@jkelec.com

Approval Sheet	
Customer	
Supplier P/N	PSC1.0M022302H2AD0-B0
Customer P/N	

Customer's Approval Certificate	
Checked & Approval by	
Date	

Version	Reason Of Modification	Modification	Drawn	Checked	Approval	Date

Please return this copy as a certification of your approval.

Add: No.1188, Jiahang Road, Jiaxing, Zhejiang, China (314001)

Tel : +86-573-82600912 82600953 Fax : +86-573-82600916

E-mail : sales@jkelec.com

1 SCOPE

This specification shall cover the characteristics of the ultrasonic flow sensor with the type PSC1.0M022302H2AD0-B0.

2 PART NO.

PART NUMBERING	CUSTOMER PART NO	SPECIFICATION NO
PSC1.0M022302H2AD0-B0		

3 PART NUMBERING

PS	C	1.00M	022302	H2	AD0	—	B0
①	②	③	④	⑤	⑥		⑦

No.	Code	Explanation
①	PS	Ceramic sensor
②	C	Ultrasonic
③	1.00M	Nominal Frequency
④	022302	Size
⑤		
⑥	H2	Ceramic Material Code
⑦	AD0	Special Requirement
⑧	B0	Bulk Package

4 OUTLINE DRAWING AND DIMENSIONS

4.1 Appearance: No visible damage and dirt.


4.2 The products conform to the RoHS directive and national environment protection law.

4.3 Dimensions (Unit: mm)

Add: No.1188, Jiahang Road, Jiaxing, Zhejiang, China (314001)

Tel : +86-573-82600912 82600953 Fax : +86-573-82600916

E-mail : sales@jkelec.com

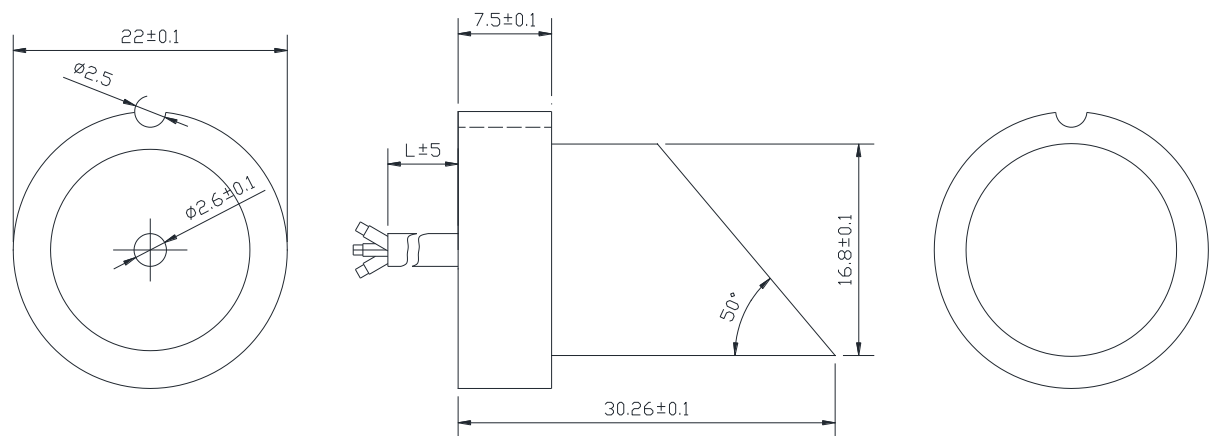

L: lead length

5 ELECTRICAL SPECIFICATIONS

Items	Unit	Content
Nominal Frequency (Fn)	MHz	1.0 ± 0.1
Resonance Impedance (R0)	Ω	150~500
Static Capacitance (Cp)	pF	$1300 \pm 20\%$

6 TEST

6.1 Test Conditions

Parts shall be measured under a condition (Temp.: $25^{\circ}\text{C} \pm 3^{\circ}\text{C}$, Humidity: 40%~70% R.H).

6.2 Test Methods

Item	Test Methods
Center Frequency (Fr)	Measuring thickness vibration mode, Agilent 4294A Impedance analyzer
Resonance Impedance (R0)	
Static Capacitance (CP)	Digital Electric Bridge (at 1kHz/1V)

7 PACKAGE

Each package has 4 inner boxes, each inner box has 10 bags, each bag has 10 pieces of ultrasonic flow sensors.

Add: No.1188, Jiahang Road, Jiaxing, Zhejiang, China (314001)

Tel : +86-573-82600912 82600953 Fax : +86-573-82600916

E-mail : sales@jkelec.com

8 OTHER

8.1 The main composition of the sensor chip is lead zirconium titanate ceramics. Please pay attention to the local environmental protection regulations when the waste is abandoned.

8.2 This specification mentions the quality of the component as a single unit. Please ensure the component is thoroughly evaluated in your application circuit.

8.3 Sensor leads, red as the positive, white as the negative. Please connect the earth wire to the metal case.

8.4 Please return one of these specifications after your signature of acceptance.

8.5 When something gets doubtful with this specification, we shall jointly work to get an agreement.

Add: No.1188, Jiahang Road, Jiaying, Zhejiang, China (314001)

Tel : +86-573-82600912 82600953 Fax : +86-573-82600916

E-mail : sales@jkelec.com